

DRAINAGE SERVICES West Jasper Place/Sherwood Bi-Weekly Project Update – February 5, 2016

The City of Edmonton is committed to providing the residents of West Jasper Place and Sherwood with regular information updates about the City's sewer rehabilitation project in your neighbourhoods. You can go to edmonton.ca/westedmontonsewer for more information or call 311 if you have a concern or comment (when you call, please identify that you are from the West Jasper Place or Sherwood communities).


In order to receive more timely updates and save paper, please consider identifying your street address and preferred email address if you would like to receive these notices electronically rather than through the mail.

Public Meeting — February 22, 2016

- A public meeting will be held on **February 22, 2016** (Monday) from **7 p.m. to 9 p.m.** at the **West Jasper Place Community League Hall**.
- Presentations on **Phase I** and **Phase II** will be given followed by the opportunity for residents to meet with City staff to ask questions.

Updates on Odour Control

- Air scrubber 1 (22 m [72 feet] long X 5.2 m [17 feet] wide) will be located on 151 Street just north of 100 Avenue.
- Air scrubber 2 (9.3 m [31 feet] long X 3 m [10 feet] wide) will be located at the intersection of 151 Street and 99 Avenue.
- Maps of the lay down area for the scrubbers will be available shortly, and residents in the immediate vicinity will be contacted.
- Both of the air scrubbers will run 24 hours a day, 7 days a week to control odour in the area.

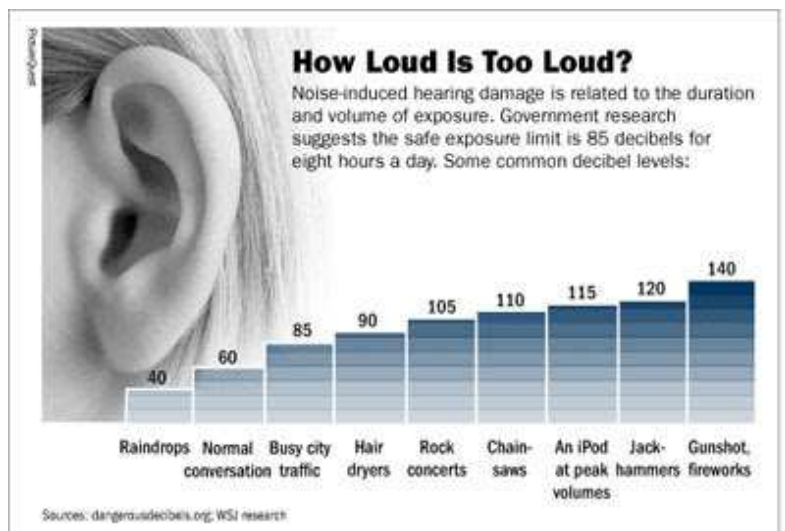

- Air scrubber 1 emits 75 decibels at three feet away. Air scrubber 2 emits 70-80 decibels 50 feet away. Before operation, City crews will install sound barriers to reduce the noise level around both scrubbers.

Construction Update

Phase One

- There are no planned activities which may cause changes to the impacts of traffic, pedestrian access and odour control over the next two weeks.
- There are two hand tunnel connections being constructed from the shaft at 151 Street & 100 Avenue. The one going north has been completed and the crew will be pouring concrete for the south connection. Once this is done, the hand tunnel connection will be complete, and construction on the base of the shaft can begin. Please note that this work will not include connecting to the existing live sanitary sewer.
- The shaft and connections at 151 Street and 100 Avenue will allow the flows within the existing sanitary trunk along 151 Street to be diverted to the recently installed shallow bypass line. This will provide dry working conditions for the crew to do their rehabilitation work in the sanitary trunk sewer along 151 Street from 100 Avenue to 99 Avenue.

Phase Two

- The assessment of the sanitary trunk along 99 Avenue (151 Street to 142 Street) has been completed, and it shows that the first 50 metres is in poor condition. Options are being developed to address the condition of this sewer trunk, and more information will be provided in future updates.

Task Force Update

- The members of the Task Force, Terms of Reference and the January 21, 2016 meeting's minutes have been put online (edmonton.ca/westedmontonsewer).

For More Information:

Call: 311 -- Email: drainageprojects@edmonton.ca

Website: edmonton.ca/westedmontonsewer

